


## Rotec Blind Flanges

### Resin Derakane 411 (or Equivalent)

Drilling Standard: AWWA C207 Class B/D/E

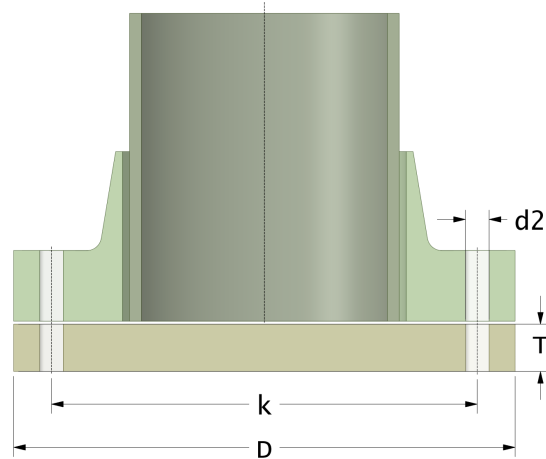

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
1	150	10	285	241	8	22	22	BFS-150-10/AW5
2	150	16	285	241	8	22	28	BFS-150-16/AW5
3	200	10	350	298	8	22	25	BFS-200-10/AW5
4	200	16	350	298	8	22	35	BFS-200-16/AW5
5	250	10	410	362	12	25	35	BFS-250-10/AW5
6	250	16	410	362	12	25	40	BFS-250-16/AW5
7	300	10	490	432	12	25	40	BFS-300-10/AW5
8	300	16	490	432	12	25	48	BFS-300-16/AW5
9	350	10	540	476	12	28	44	BFS-350-10/AW5
10	350	16	540	476	12	28	52	BFS-350-16/AW5
11	400	10	600	540	16	28	48	BFS-400-10/AW5
12	400	16	600	540	16	28	60	BFS-400-16/AW5
13	450	10	644	578	16	32	52	BFS-450-10/AW5
14	450	16	644	578	16	32	68	BFS-450-16/AW5
15	500	3	720	635	20	32	35	BFS-500-03/AW5
16	500	6	720	635	20	32	44	BFS-500-06/AW5


#### Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

## Rotec Blind Flanges

### Resin Derakane 411 (or Equivalent)

Drilling Standard: AWWA C207 Class B/D/E

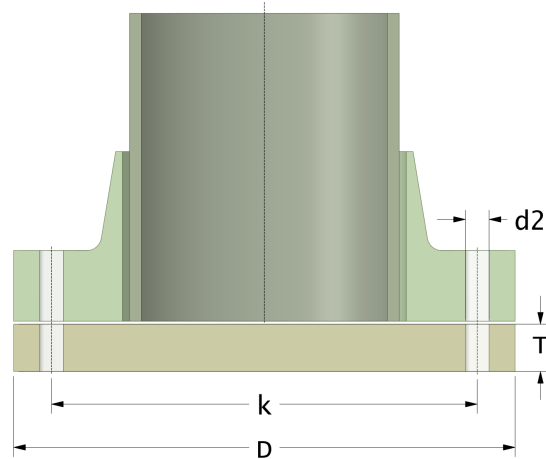

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
17	500	10	720	635	20	32	60	BFS-500-10/AW5
18	500	16	720	635	20	32	74	BFS-500-16/AW5
19	550	3	775	692	20	35	40	BFS-550-03/AW5
20	550	6	775	692	20	35	52	BFS-550-06/AW5
21	550	10	775	692	20	35	64	BFS-550-10/AW5
22	550	16	775	692	20	35	80	BFS-550-16/AW5
23	600	3	844	749	20	35	44	BFS-600-03/AW5
24	600	6	844	749	20	35	52	BFS-600-06/AW5
25	600	10	844	749	20	35	68	BFS-600-10/AW5
26	600	16	844	749	20	35	85	BFS-600-16/AW5
27	650	3	890	806	24	35	46	BFS-650-03/AW5
28	650	6	890	806	24	35	56	BFS-650-06/AW5
29	650	10	890	806	24	35	71	BFS-650-10/AW5
30	650	16	890	806	24	35	88	BFS-650-16/AW5
31	700	3	950	864	28	35	48	BFS-700-03/AW5
32	700	6	950	864	28	35	60	BFS-700-06/AW5
33	700	10	950	864	28	35	74	BFS-700-10/AW5


#### Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

## Rotec Blind Flanges

### Resin Derakane 411 (or Equivalent)

Drilling Standard: AWWA C207 Class B/D/E

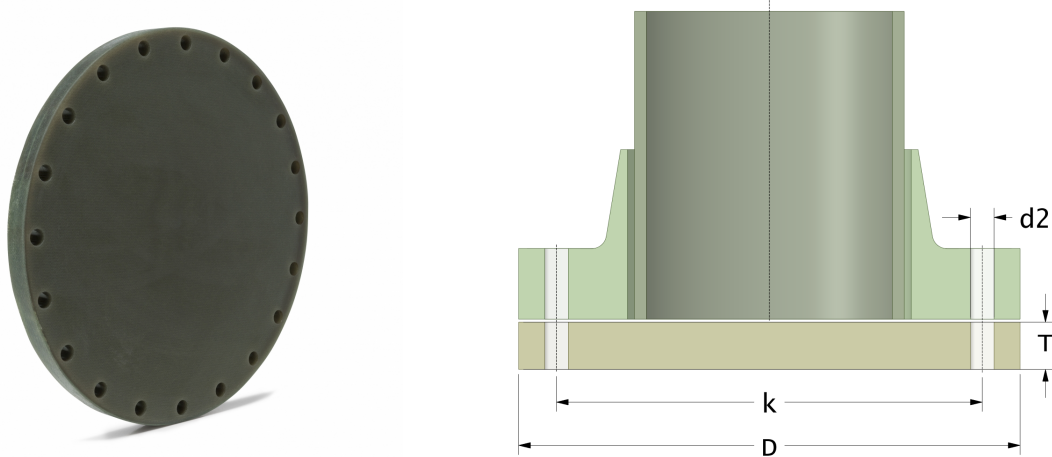

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
34	700	16	950	864	28	35	92	BFS-700-16/AW5
35	750	3	1005	914	28	35	53	BFS-750-03/AW5
36	750	6	1005	914	28	35	64	BFS-750-06/AW5
37	750	10	1005	914	28	35	79	BFS-750-10/AW5
38	750	16	1005	914	28	35	99	BFS-750-16/AW5
39	800	3	1085	978	28	41	60	BFS-800-03/AW5
40	800	6	1085	978	28	41	68	BFS-800-06/AW5
41	800	10	1085	978	28	41	85	BFS-800-10/AW5
42	800	16	1085	978	28	41	105	BFS-800-16/AW5
43	850	3	1135	1029	32	41	60	BFS-850-03/AW5
44	850	6	1135	1029	32	41	72	BFS-850-06/AW5
45	850	10	1135	1029	32	41	90	BFS-850-10/AW5
46	850	16	1135	1029	32	41	110	BFS-850-16/AW5
47	900	3	1190	1086	32	41	60	BFS-900-03/AW5
48	900	6	1190	1086	32	41	78	BFS-900-06/AW5
49	900	10	1190	1086	32	41	95	BFS-900-10/AW5
50	900	16	1190	1086	32	41	115	BFS-900-16/AW5


#### Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

## Rotec Blind Flanges

### Resin Derakane 411 (or Equivalent)

Drilling Standard: AWWA C207 Class B/D/E

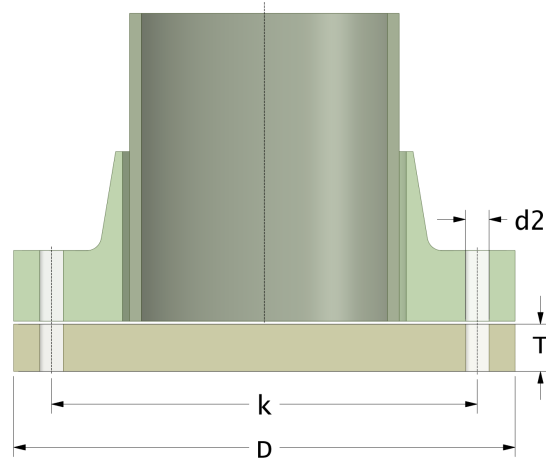

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
51	1000	3	1320	1200	36	41	68	BFS-1000-03/AW5
52	1000	6	1320	1200	36	41	85	BFS-1000-06/AW5
53	1000	10	1320	1200	36	41	105	BFS-1000-10/AW5
54	1000	16	1320	1200	36	41	130	BFS-1000-16/AW5
55	1100	3	1430	1314	40	41	74	BFS-1100-03/AW5
56	1100	6	1430	1314	40	41	95	BFS-1100-06/AW5
57	1100	10	1430	1314	40	41	110	BFS-1100-10/AW5
58	1100	16	1430	1314	40	41	140	BFS-1100-16/AW5
59	1200	3	1540	1422	44	41	80	BFS-1200-03/AW5
60	1200	6	1540	1422	44	41	105	BFS-1200-06/AW5
61	1200	10	1540	1422	44	41	120	BFS-1200-10/AW5
62	1200	16	1540	1422	44	41	155	BFS-1200-16/AW5
63	1300	3	1660	1537	44	47	85	BFS-1300-03/AW5
64	1300	6	1660	1537	44	47	110	BFS-1300-06/AW5
65	1300	10	1660	1537	44	47	130	BFS-1300-10/AW5
66	1300	16	1660	1537	44	47	165	BFS-1300-16/AW5
67	1350	3	1720	1594	44	47	90	BFS-1350-03/AW5


#### Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

## Rotec Blind Flanges

### Resin Derakane 411 (or Equivalent)

Drilling Standard: AWWA C207 Class B/D/E

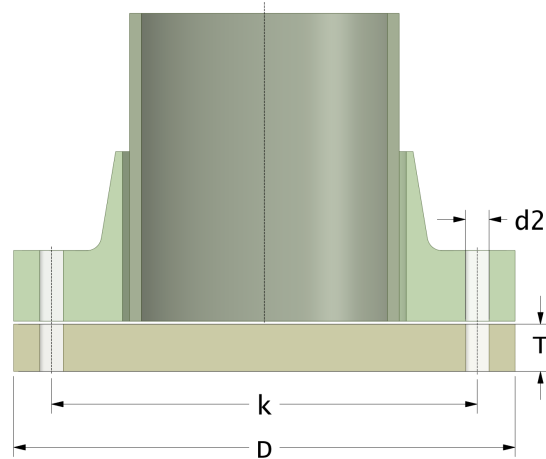


#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
68	1350	6	1720	1594	44	47	115	BFS-1350-06/AW5
69	1350	10	1720	1594	44	47	135	BFS-1350-10/AW5
70	1350	16	1720	1594	44	47	170	BFS-1350-16/AW5
71	1500	3	1890	1759	52	47	100	BFS-1500-03/AW5
72	1500	6	1890	1759	52	47	125	BFS-1500-06/AW5
73	1500	10	1890	1759	52	47	150	BFS-1500-10/AW5
74	1500	16	1890	1759	52	47	190	BFS-1500-16/AW5
75	1650	3	2060	1930	52	47	105	BFS-1650-03/AW5
76	1650	6	2060	1930	52	47	140	BFS-1650-06/AW5
77	1650	10	2060	1930	52	47	160	BFS-1650-10/AW5
78	1650	16	2060	1930	52	47	205	BFS-1650-16/AW5
79	1800	3	2230	2096	60	47	120	BFS-1800-03/AW5
80	1800	6	2230	2096	60	47	145	BFS-1800-06/AW5
81	1800	10	2230	2096	60	47	180	BFS-1800-10/AW5
82	1800	16	2230	2096	60	47	225	BFS-1800-16/AW5
83	1950	3	2400	2261	64	47	115	BFS-1950-03/AW5
84	1950	6	2400	2261	64	47	190	BFS-1950-06/AW5

#### Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

## Rotec Blind Flanges

Resin Derakane 411 (or Equivalent)  
 Drilling Standard: AWWA C207 Class B/D/E

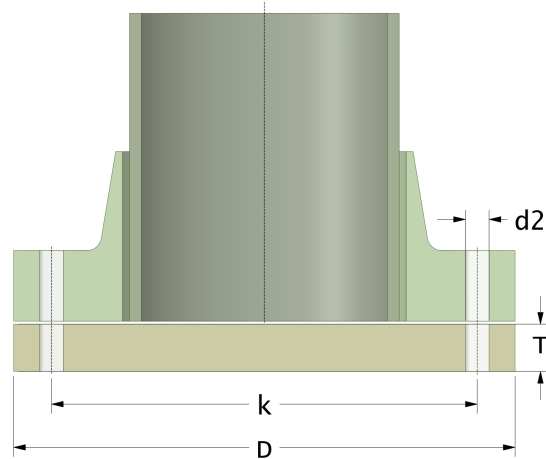

#	DN (mm)	Pmax (bar)	D (mm)	k (mm)	Holes (no.)	d2 (mm)	T (mm)	Article Number
85	1950	10	2400	2261	64	47	215	BFS-1950-10/AW5
86	2100	3	2570	2426	64	54	140	BFS-2100-03/AW5
87	2100	6	2570	2426	64	54	175	BFS-2100-06/AW5
88	2100	10	2570	2426	64	54	210	BFS-2100-10/AW5
89	2250	3	2730	2591	68	62	140	BFS-2250-03/AW5
90	2250	6	2730	2591	68	62	185	BFS-2250-06/AW5
91	2250	10	2730	2591	68	62	225	BFS-2250-10/AW5
92	2400	3	2910	2756	68	62	155	BFS-2400-03/AW5
93	2400	6	2910	2756	68	62	200	BFS-2400-06/AW5
94	2400	10	2910	2756	68	62	240	BFS-2400-10/AW5

### Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.