


Raccords

Couplage conique (DER 411 ou équiv.)

All Products

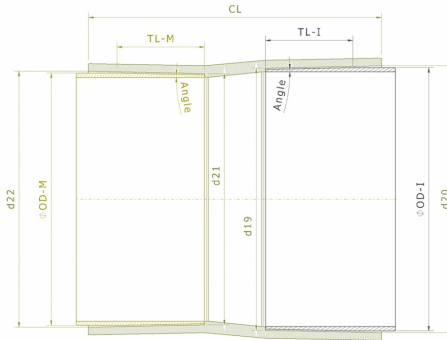

| # | DN (mm) | Pmax. (bar) | d19 (mm) | d20 (mm) | d21 (mm) | d22 (mm) | TL-I (mm) | TL-M (mm) | CL (mm) | Angle (deg) | Article Number |
|----|------------|----------------|-------------|-------------|-------------|-------------|--------------|--------------|------------|----------------|-----------------|
| 1 | 150 | 10 | 165 | 166 | 156 | 157 | 57 | 57 | 200 | 1.0 | MTT150-ITT6-10 |
| 2 | 150 | 16 | 165 | 168 | 156 | 159 | 57 | 57 | 200 | 1.0 | MTT150-ITT6-16 |
| 3 | 200 | 10 | 215 | 218 | 206 | 209 | 63 | 63 | 220 | 1.0 | MTT200-ITT8-10 |
| 4 | 200 | 16 | 215 | 218 | 206 | 209 | 86 | 86 | 220 | 1.0 | MTT200-ITT8-16 |
| 5 | 250 | 10 | 269 | 273 | 256 | 260 | 72 | 72 | 240 | 1.2 | MTT250-ITT10-10 |
| 6 | 250 | 16 | 269 | 274 | 256 | 261 | 88 | 88 | 240 | 1.5 | MTT250-ITT10-16 |
| 7 | 300 | 10 | 320 | 324 | 306 | 310 | 91 | 91 | 250 | 1.2 | MTT300-ITT12-10 |
| 8 | 300 | 16 | 320 | 326 | 306 | 313 | 95 | 95 | 250 | 2.0 | MTT300-ITT12-16 |
| 9 | 350 | 10 | 351 | 356 | 356 | 361 | 95 | 95 | 260 | 1.2 | MTT350-ITT14-10 |
| 10 | 350 | 16 | 351 | 359 | 356 | 364 | 95 | 95 | 260 | 2.0 | MTT350-ITT14-16 |
| 11 | 400 | 10 | 400 | 406 | 406 | 412 | 84 | 84 | 280 | 1.5 | MTT400-ITT16-10 |
| 12 | 400 | 16 | 400 | 408 | 406 | 414 | 112 | 112 | 280 | 2.0 | MTT400-ITT16-16 |
| 13 | 450 | 10 | 441 | 447 | 457 | 463 | 88 | 88 | 300 | 1.5 | MTT450-ITT18-10 |
| 14 | 450 | 16 | 441 | 449 | 457 | 465 | 126 | 126 | 300 | 2.0 | MTT450-ITT18-16 |
| 15 | 500 | 10 | 489 | 496 | 507 | 514 | 118 | 118 | 320 | 1.5 | MTT500-ITT20-10 |
| 16 | 500 | 16 | 489 | 498 | 507 | 516 | 146 | 146 | 320 | 2.0 | MTT500-ITT20-16 |

Disclaimer


Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

04-11-2022

Raccords

Couplage conique (DER 411 ou équiv.)

All Products

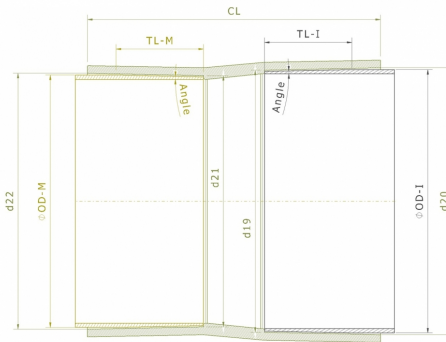

| # | DN (mm) | Pmax. (bar) | d19 (mm) | d20 (mm) | d21 (mm) | d22 (mm) | TL-I (mm) | TL-M (mm) | CL (mm) | Angle (deg) | Article Number |
|----|------------|----------------|-------------|-------------|-------------|-------------|--------------|--------------|------------|----------------|-----------------|
| 17 | 600 | 10 | 586 | 595 | 607 | 616 | 134 | 134 | 380 | 2.0 | MTT600-ITT24-10 |
| 18 | 600 | 16 | 586 | 598 | 607 | 619 | 178 | 178 | 380 | 2.0 | MTT600-ITT24-16 |

Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

04-11-2022